

Product's Features

- Anti-fog shade
- Protect the eye design
- Intelligent drive, plug-in connector

Applications


- Residential, shopping malls, office, exhibition hall and other places

Technical parameters



- Light Source : LED
- Color temperature: 2700-3000K,3500-4000K,6000-6500K
- Light Power : 16W-88W
- Electrical Type: Smart Drive
- Working Power : 220V~240V , 50Hz
- IP Grade : IP20
- Insulation Grade : Class 1
- Safety Standards : IEC598
- Color rendering index:Ra ≥ 80 , Ra ≥ 90
- Lumen value:100LM/W,120LM/W
- Life expectancy: 50,000 h ( Ta=25°C )




Order Guide :

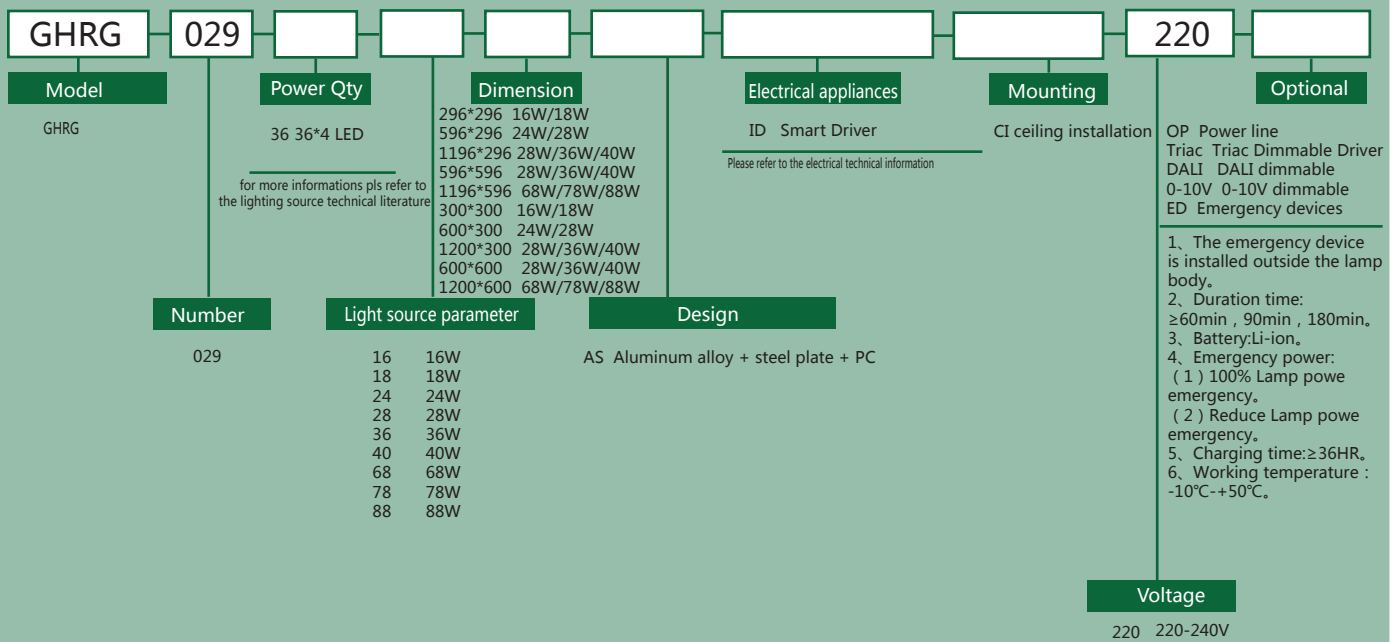

Remark:compliance with the requirement of the buyer

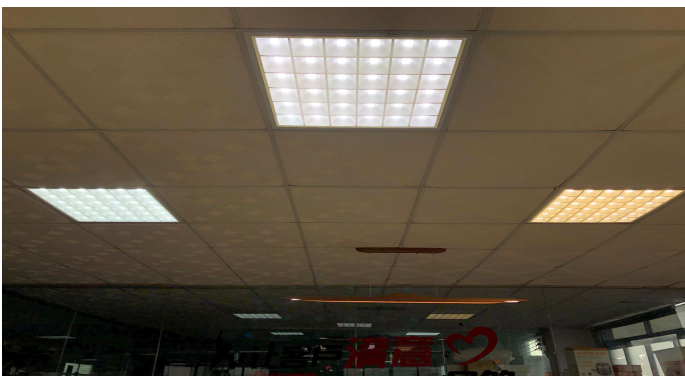

Model	Number	Color temperature	Power(W)	Height(mm)
GHRG	029	2700K-6500K	16/18	296*296/300*300
GHRG	029	2700K-6500K	24/28	596*292/600*300
GHRG	029	2700K-6500K	28/36/40	596*596/600*600
GHRG	029	2700K-6500K	28/36/40	1196*296/1200*300
GHRG	029	2700K-6500K	68/78/88	1196*596/1200*600

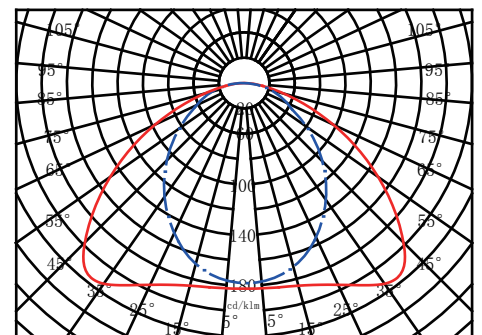

Lighting control	Dimming method	luminous flux
Manual control Intelligent control Emergency control	Dim0/1-10V dimmable DALI dimmable Triac dimmable DMX512 dimmable Not dimmable	100LM/W 120LM/W

LED driver	light source	Life expectancy
Optional configuration brand: MEAN WELL PHILIPS OSRAM TRIDONIC LTECH LIFUD KEGUPOWER	Optional configuration brand: CREE BRIDGELUX PHILIPS OSRAM EPISTAR SANAN	50,000 h ( Ta=25°C )

Certification certificate	Color rendering	Color temperature
CE RoHS COGC CCC	Ra ≥ 80 Ra ≥ 90	2700-3000K 3500-4000K 6000-6500K